
AEOLUS


Professional Vet Equipments Supplier







BTS-136E



BTS-161



BTS-139E

Distributor Contacts



Producer: Shanghai TOEX International Trading Co., Ltd. Address: Floor 5, Building 6, No.675 Zhujin Road, Songjiang District, Shanghai, 201615, China

Manufacturer: Shanghai Xunyuan Industrial Co., Ltd. Address: Lane 29, No.1509 East Qianming Road, Fengjing Town, Jinshan District, Shanghai.



Stainless Steel Bathing Tub

BTS-231



Profor Pros

www.AEOLUSpet.com

AEOLUS BTS-231 Stainless Steel Bathing Tub is designed for animal bathing. It features a splash guards, deluxe SUS304 stainless steel panels, an easy-to-use sliding door, overhead grooming arm, a water sprayer bracket, restraint loops, storage basket, alloy sprayer, anti-slippery bottom mat, puppy booster, stainless steel hair catching drainage, two tub floor panels, waste hose.

Package Inspection

The manufacturer is not liable for any damage caused by a third party "Transport or Delivery Company".

The day the unit is delivered, an inspection of the outer packing should be made for any damage to the packing box.

Then the unit should be unpacked carefully; all components, accessories and the table itself should be inspected for any damage or loss of components.

If any damage is evident, the carrier or dealer should be notified immediately.


Parameters

Net weight:	57kg 125.7lbs
Gross weight:	80kg 176.3lbs
Dimension:	127×69×134.5cm 50"×27 11/64"×52 61/64"
Package:	134×74×65cm 52 3/4"×29 9/64"×25 19/32"
Volume:	0.64cbm

Safety Warning

- 1. Use only as described in this manual. Use only manufacturer's recommended attachments.
- DO NOT use outdoors or on wet surfaces. DO NOT place the product on an uneven or soft ground.
- 3. This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety. Children should be supervised to ensure that they do not play with the product.
- 4. DO NOT modify, disassemble or repair.
- 5. Avoid using the product in dusty, vibrating and wet environment and in chemical storage place.

Overview

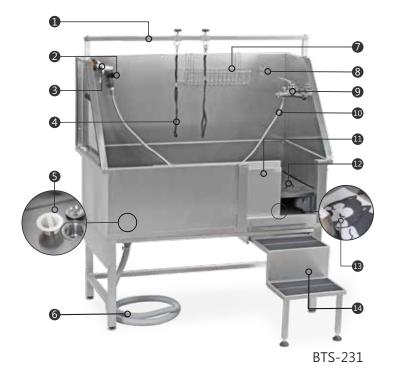

- Elevated overhead grooming arm
- Sprayer holder
- Alloy sprayer
- Restraint loops
- Hair catching drainage
- Waste pipe
- Storage basket
- Open state in the state of t
- Second Property Pr
- Soft hose
- Sliding door
- Puppy booster
- Anti-slippery bottom mat
- Step-on ramp

Catching Drainage to the Waste Hose. Apply the silicone sealant evenly onto the contact surface around the drain hole on the bottom of the Tub Basin. Put the Drain Head in the drain hole and screw the Drain Head to Drain Hose securely and use lock collar to fasten.

- 6. Screw the Sprayer Holder and Dog Fixture Ring onto the back plate.
- 7. Screw the Faucet onto the side plate.
- 8. Put The Anti-slippery bottom mat in the Tub Basin.
- 9. Insert the Step-on Ramp to the bottom of the Tub Basin, and make sure it stands steadily.

Operation Instructions

- 1. To bathe large breeds or older dogs, lead it along the Step-on Ramp into the Tub. To bathe small breeds, put it on the Plastic Puppy Booster in the tub.
- 2. Start a shower.
- 3. After the shower, let the water out of the tub and take the animal out.
- 4 Clean the tub with a cloth

Maintenance

In between usages, the tub should be cleaned with a soft cloth or sponge using a mild cleaning agent.

Service Support

Contact us if you cannot solve your problem with this manual.

Dallas

11307 Indian Trail. Dallas. Texas 75229. USA.

Tel: +1 469 930 6359 Web: www.aeoluspet.com

Singapore

150 South Bridge Road, Singapore 058727 Tel: + 65-6533 6524 / 9633 2734

Shanghai

Floor 5, Building 6, No. 675, Zhujin Road, Songjiang District, Shanghai, China.

Tel: +86-21-67632060, 67632364

Assembly Instructions

- 1. Unpack and assemble the Base Leg with screws.
- 2. Place the Tub Basin onto the Base Leg. Bolt the Tub Basin to the Base Leg by putting screws into the holes on the bottom of both sides of the Tub Basin
- 3. Assemble the Tub Splash, the largest plate is on the back, and two smaller ones on both sides. Inset Bolts and securely tighten them with Nuts.
- 4. Pull the Overhead Grooming Arm to a proper length, and fasten it with Clamp. Connect it with the side splash plates with Screws.
- 5. Put the Tub Splash onto the Tub Basin. Insert Bolts and securely tighten them with Nuts. Put the Hair Catching Drainage in the drain hole of the Tub Basin and securely bolt the Hair